



STONE

AVT

5MM
ACOUSTICAL
VINYL TILE



STYLE MEETS PERFORMANCE

Our Stone Collection offers the aesthetic of concrete and natural materials with high-definition design. Twice as long as they are wide, Evo Stone tiles create the look of solid blocks of concrete and stone; giving your space a stylish industrial look while also improving insulation and sound absorption.

AVT


ACOUSTICAL VINYL TILE

STONE

AVT™ is the result of a deep understanding of material and machinery lead by a vertically integrated manufacturing process. A superior, design-forward, true 5mm flooring product with advanced structural layers, exceptional scratch resistance and quality sound absorption.

EVO LAYERS

EvoCore layering technology provides dimensional stability and consistent thickness. Easy to clean and maintain, the coated surface layers are scratch and wear resistant, waterproof, and tough enough for commercial applications.

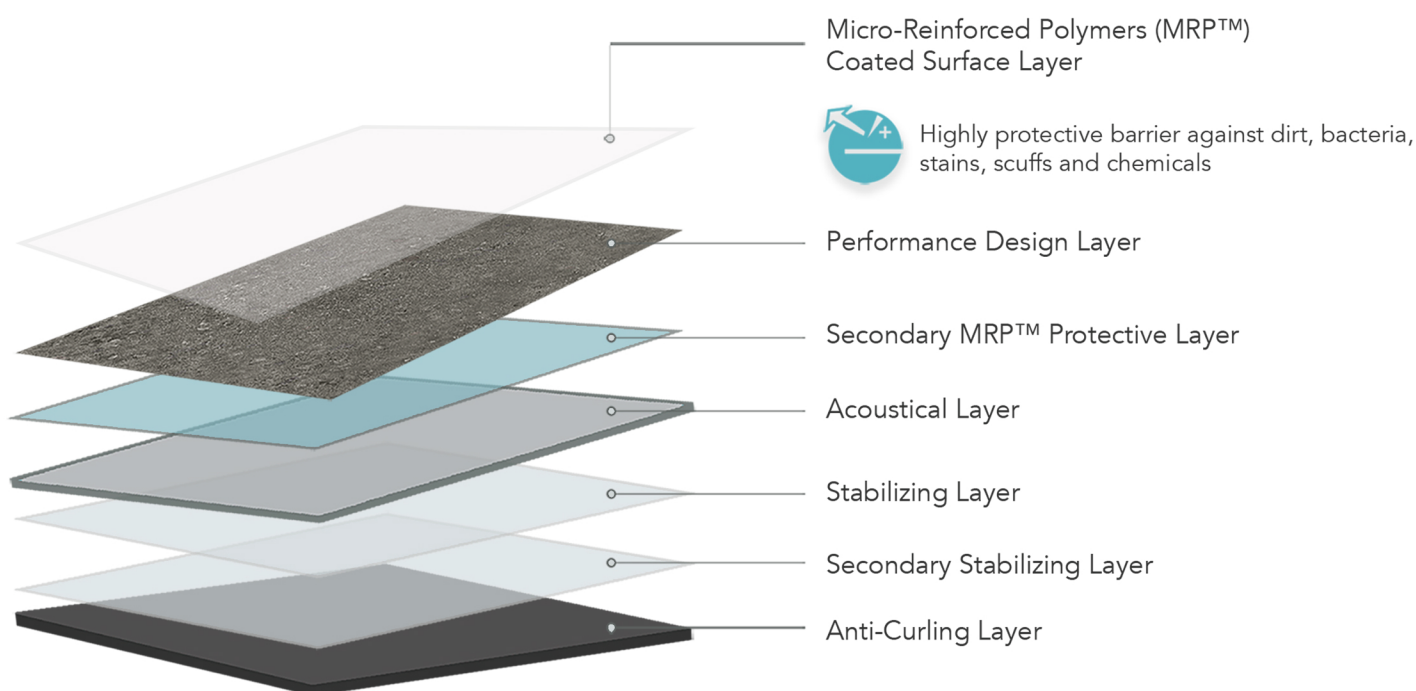

QUICK
Quick & easy
installation



THERMO-ACOUSTIC
Layering system that
provides insulation and
absorbs sound



EASY
Minimal cleaning time
and low maintenance



COLORFAST
Non-fading properties
retain gorgeous
original colors over
time



Most Hygienic

Patented dual protection coating system meets environmental standards for anti-bacterial and anti-microbial performance
Safe and Clean
Easy Cleaning and Maintenance



Tough + Waterproof

Superior wear resistance and waterproof function for commercial applications



Most Stable + Uniquely Layered Structure

The most reliable EvoCore structure for outstanding dimensional stability. Consistent product thickness and sizing with no peeling, gapping, cupping or curling

Urban Stone | ST201

Whetstone | ST206

Cool Crete | ST204

Warm Crete | ST203

Flint | ST205




EVO
FLOORS

Warm Crete | ST203

AVT

5MM ACOUSTICAL
VINYL TILE

STONE



Urban Stone | ST201



Urban Gray | ST202



Warm Crete | ST203



Cool Crete | ST204




Flint | ST205



Whetstone | ST206



Sidewalk | ST207

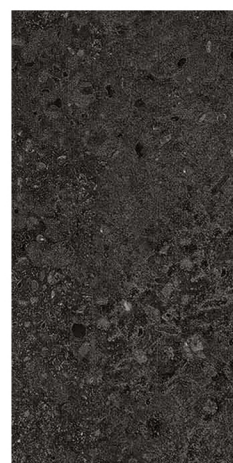


Asphalt | ST208

12 in x 24 in
Tile size




5.0 mm
Thickness


Installation Methods



Herringbone



Stacked



Brick



The printed images may not be an accurate reproduction of the products' actual colorways. We strive to offer an authentic representation, but images may vary according to press run and digital displays. These images are intended as a guide only. Visit evofloors.com for samples and more information.










STONE

Technical Specifications

Sizes

Size	Thickness	Pcs/Carton	Sqft/Carton	Lbs/Carton
12 in x 24 in	5.0 mm	10 pcs	20 sqft	33.5 lbs

Testing

Test Item		Standard	Results
Level of use		ISO 10874	33, Heavy commercial
Static load limit		ASTM F970	2,000 psi
Squareness & Straightness		ISO 24342 ASTM F2055	Passes No deviation, ≤0.1mm
Flexibility		ASTM F137	Passes
Dimensional stability		ASTM F2199	Passes
Resistance to chemicals		ASTM F925	Passes, No defects
Resistance to light		ASTM F1515	Passes
Resistance to heat		ASTM F1514	Passes
Fire resistance		ASTM E648	Passes
Smoke density		ASTM E662	Passes
Slip resistance		ASTM E303	Passes
Indoor air quality			Low VOC, Floor Score certified
Sound insulation		ISO 10140	>15db Rating 70, STC Rating 63


Caution

Condition in at least 19°C (67°F) or the normal temperature of the room where the product is to be laid, for at least 48 hours before installing. Cartons must be stacked less than 5 high and tiles removed 30 minutes before use. The site conditions must be maintained during installation and for at least 48 hours after completion. Evo Floors, LLC will not accept claims where these instructions have not been followed.

Manufacturing

ISO 9001 Quality Management System
ISO 14001 Environmental Management System
OSHAS 18001 Occupational Health and Safety Management System

Certification



Please visit www.evo floors.com for detailed installation / maintenance guides and technical information.