

**WOVEN**

**HRC**

HYBRID  
RESILIENT  
CARPET



# HERRINGBONE

Lace | 2501  
Ravel | 2502  
Link | 2505  
Twist | 2506

## Most Hygienic



Patented dual protection coating system meets environmental standards for anti-bacterial and anti-microbial performance  
Safe and Clean  
Easy Cleaning and Maintenance

## Most Stable +

### Uniquely Layered Structure



The most reliable EvoCore structure for outstanding dimensional stability.  
Consistent product thickness allows for mixing and matching HRC™ patterns

## Tough + Waterproof



Superior wear resistance and waterproof function for commercial applications

## Fray-Proof



Clean-cut finishing to prevent fraying even when tiles are cut into unique shapes during installation

Lace | 2501  
Link | 2505  
Twist | 2506

Ravel | 2502  
Blend | 2504  
Link | 2505



# HRC


HYBRID RESILIENT CARPET

HRC™ offers the best of both worlds where the comfort of carpet meets the functionality of resilient flooring

## WOVEN COLLECTION

## EVO LAYERS

EvoCore layering technology provides dimensional stability and consistent thickness. Easy to clean and maintain, the coated surface layers are scratch and slip-resistant, waterproof, and tough enough for commercial applications.

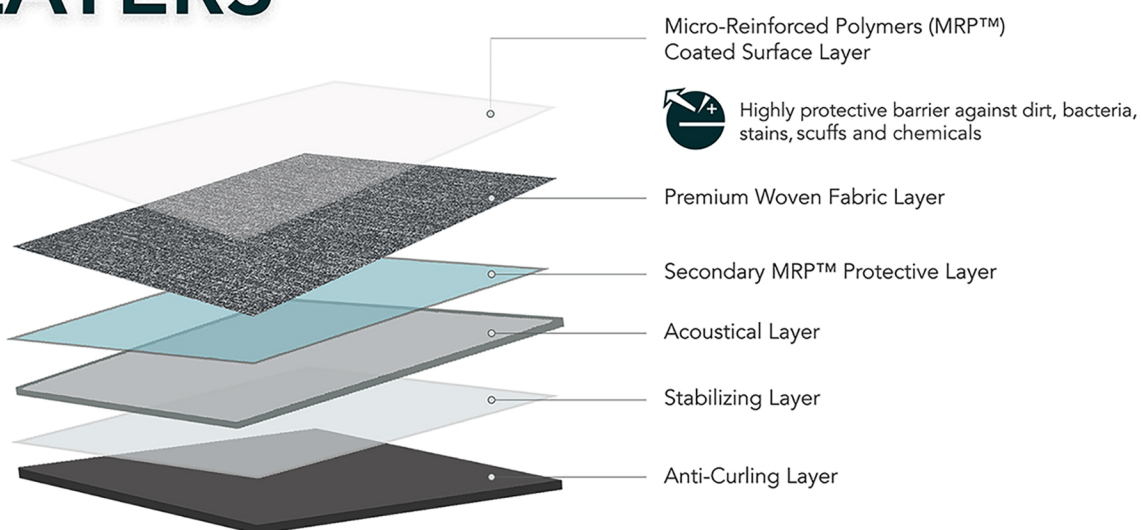

## MELANGE

Mesh | 2601  
Gauge | 2605  
Spun | 2606



## OMBRE

String | 2401  
Cable | 2402  
Twine | 2404



**SAFE**  
Certified non-toxic,  
phthalate-free,  
and fiberglass-free  
fabric



**QUICK  
& EASY**  
Quick & easy  
installation



**EASY**  
Minimal cleaning time  
and low maintenance



**SILENT & SOFT**  
Soft surface that  
absorbs sound



**NON-SLIP**  
D11, slip-resistance  
with the woven fabric  
textured surface



**COLORFAST**  
Non-fading properties  
retain gorgeous  
original colors over  
time

Cable | 2402

Rope | 2403

**EVO**  
FLOORS



# HRC


## HYBRID RESILIENT CARPET WOVEN COLLECTION

### HERRINGBONE



Lace | 2501   Ravel | 2502   Bind | 2503   Blend | 2504   Link | 2505   Twist | 2506

### MELANGE

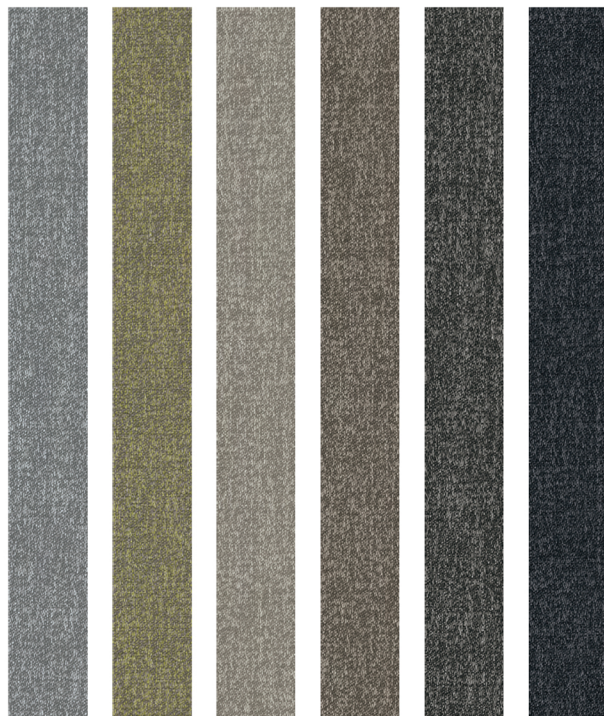

Mesh | 2601   Thatch | 2602   Fiber | 2603   Braid | 2604   Gauge | 2605   Spun | 2606

### OMBRE



String | 2401   Cable | 2402   Rope | 2403   Twine | 2404   Strand | 2405   Cord | 2406

25 cm x 100 cm  
(9.84 in x 39.37 in)  
Plank size



3.0 mm  
Thickness

16 Planks/Carton  
43.03 SqFt/Carton  
44.08 Lbs/Carton


#### Installation Methods



Herringbone



Double  
Herringbone



Staggered



Basket  
Weave



The printed images may not be an accurate reproduction of the products' actual colorways. We strive to offer an authentic representation, but images may vary according to press run and digital displays. These images are intended as a guide only. Visit [evofloors.com](http://evofloors.com) for samples and more information.





## WOVEN

### Technical Specifications

#### Sizes

Size	Thickness	Pcs/Carton	Sqft/Carton	Lbs/Carton
25 cm x 100 cm (9.84 in x 39.37 in)	3.0 mm	16 pcs	43.03 sqft	44.08 lbs

#### Testing


Test Item		Standard	Results
Level of use		ISO 10874	33, Heavy commercial
Fraying		ISO 10833	Frayproof
Thermal resistance		ISO 8302	0.02m²K/W
Castor chair resistance		ISO 4918	No damage
Dimensional stability		ISO 23999 EN 986	≤ 0.10% ( Norm: ≤ 0.25% ) Passed
Fire resistance		EN 13501-1	Bfl -s1
Indoor air quality			Low VOC (floor score certified)
Underfloor heating		EN 12524	Suitable
Light fastness		ISO 105-B02	≥ 6
Slip resistance		ASTM E303 EN 13893	R11, Suitable for wet and dry environments DS
Flexibility		ISO 24344	Passed
Impact sound insulation		ISO 10140-3	9dB
Body Voltage		EN 1815	≤ 2KV
Squareness & Straightness		ISO 24342 ASTM F2055	No deviation ≤ 0.01 in
Residual indentation		ISO 24343-1 ASTM F1914	≤ 0.1mm < 8%
Resistance to chemicals		ISO 26987 ASTM F925	No Defects No Defects

#### Caution

Condition in at least 19°C (67°F) or the normal temperature of the room where the product is to be laid, for at least 48 hours before installing. Cartons must be stacked less than 5 high and tiles removed 30 minutes before use. The site conditions must be maintained during installation and for at least 48 hours after completion.

Evo Floors, LLC will not accept claims where these instructions have not been followed.

#### Certification



Please visit [www.evofloors.com](http://www.evofloors.com) for detailed installation / maintenance guides and technical information.